


NELSON Limitrace LT-210



: 33 / 10° ,61 / 0°
 : 85° (: 65° / 1000)
 : 1,22 2
 : 6,2 12,2
 : 12 : -40°
 : -40°

NELSON LIMITRACE LT-

UV-

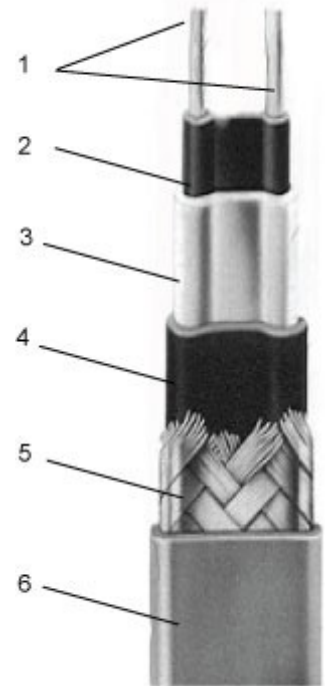

- 1-
- 2 -
- 3 -
- 4 -
- 5 -
- 6 -

LT-210

— 150

- JT-

- J -





	10 ° / 0° @ 240V		[]	°	°	-
LT 210	33/61	240	94	65	85	T5

°	/
-6°C	0,341
-18°C	0,380
-29°C	0,423
-40°C	0,462

Тип кабеля	Стартовая температура	Максимальная длина контура на Автомат Защиты (гр. С) при 240 В [м]			
		16	20	30	40
LT 210	-6°C	44	58	88	117
	-18°C	39	52	78	105
	-29°C	35	47	70	94
	-40°C	32	43	65	86

- 1.
2. 208, 220 270 ,
3. 2-
/ , 15 , amp/meter,
4. ().





240

	208		220		277	
LT 210	0,86	0,93	0,92	0,96	1,16	1,09

NELSON Limitrace CLT



VDE



N PPC 00-30995

II 2 G D EEx e II
KEMA 03ATEX 2019U

LT 210-JT

- JT

- 10

/ (33 /)—

/

3,28

- 2

240

