




: 32 / 10° (220)
: 65°
: 85° (1000)
: 1,22 2
: 6,2 12,2
: 12 : -40°
-40°

NELSON LIMITRACE LT-

UV-

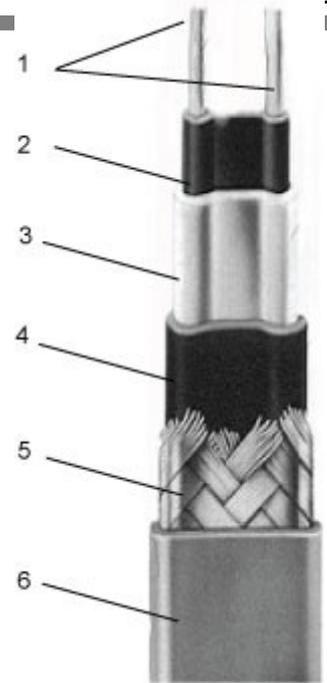

- 1-
- 2 -
- 3 —
- 4 —
- 5 -
- 6 -

- CB -

- SS -

- JT-

-J -




	°C @ 240V		[]	°C	°C	-
LT 23	9,8	240	185	65	85	T6
LT 25	16	240	155	65	85	T6
LT 28	26	240	125	65	85	T5
LT 210	33	240	115	65	85	T5

Тип кабеля	Стартовая температура	Максимальная длина контура на Автомат Защиты (гр. С) при 230 В [м]				
		16	20	25	32	40
LT 23	10°C	241	302	377	482	603
	-5°C	192	240	300	384	480
	-20°C	159	199	249	319	398
	-30°C	143	179	224	286	358
LT 25	10°C	170	213	266	341	426
	-18°C	135	169	212	271	338
	-29°C	112	140	175	225	281
	-30°C	101	126	157	202	252
LT 28	10°C	118	148	184	236	295
	-18°C	97	121	151	194	242
	-20°C	82	103	128	165	205
	-30°C	75	93	117	150	186
LT 210	10°C	86	108	135	172	215
	-18°C	72	90	113	145	181
	-20°C	62	78	97	125	156
	-30°C	59	71	89	114	143

- 1.
2. 208, 220 270 ,
3. 2- 15 , amp/meter,
4. ().

Power Output Rating @ 230v

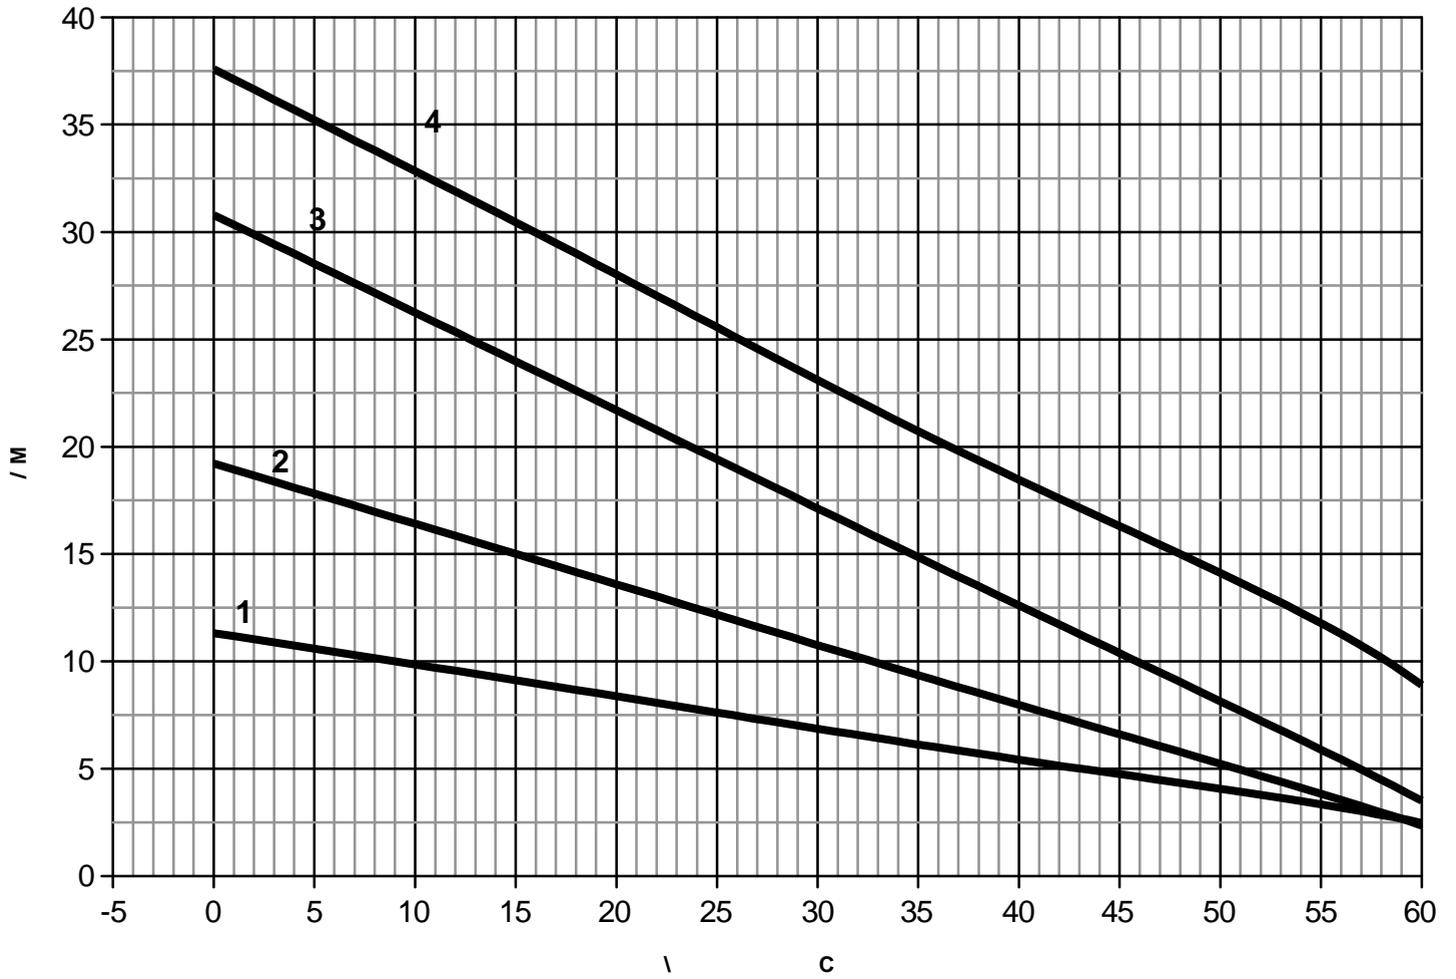

1 — LT 23 , 2 — LT 25 , 3 — LT 28, 4 - LT-210

	[/]			
	LT 23	LT 25	LT 28	LT 210
240	9,8	16	26	33

240

	208		220		277	
LT 23	0,76	0,93	0,85	0,96	1,27	1,07
LT 25	0,79	0,93	0,87	0,96	1,24	1,07
LT 28	0,84	0,93	0,90	0,96	1,19	1,08
LT 210	0,86	0,93	0,92	0,96	1,16	1,09

NELSON Limitrace LT



VDE



II 2 G D EEx e II
KEMA 03ATEX 2019U

N PPC 00-30995

LT 210-JT

- JT

- 10

/ (33 /)—

/

3,28

- 2

240

Z1

(NESLON TA TH)

